



# Product Specification Sheet

## Acclaim Axial Zoomspot White



**NOW available with a white exterior high heat coating and interior black finish.**

This option is very much in demand for churches, hotels and meeting rooms and other such venues where the traditional black finish is inappropriate.

### Features

Available in 18°-34° or 24°-44° beam angles.

Interchangeable lens tray between Medium and Wide versions.

Beam adjustable from smooth, flat beam for pattern projections to high intensity peak distribution for stage washes.

Unique easy to use and precise adjustable beam Peak-Flat mechanism.

Captive shutters offering wider degree of masking angles.

Heat control in – beam filter.

Slot provided for Iris or rotatable (35°) pattern holder.

'Swing-down' doors for easy access to lens cleaning.

Mains isolation via micro -switch when back is removed for lamp changes.

Fully compliant to CE standards.

### Lamps: 220V -240V

#### 600W

##### GKV

15,000 lumens 400 hours average life

##### GLB

13,000 lumens 1500 hours average life

### Order codes

12ACAX1834WH

Axial Zoomspot 18° - 34° White

12ACAX2444WH

Axial Zoomspot 24° - 44° White

15ACIRIS

Acclaim iris

15ACGHW

Rotatable pattern holder - white handle

15ACGHGW

Rotatable pattern holder for glass gobos - white handle

15ACAX1834LT

Acclaim 18°- 34° lens tray

15ACAX2444LT

Acclaim 24°- 44° lens tray

15ACSM

Lens safety mesh

20HC

Suspension hookclamp


20SC

Safety bond



## Photometric data

Tests conducted using a standard GKV, 600W, 240V lamp.

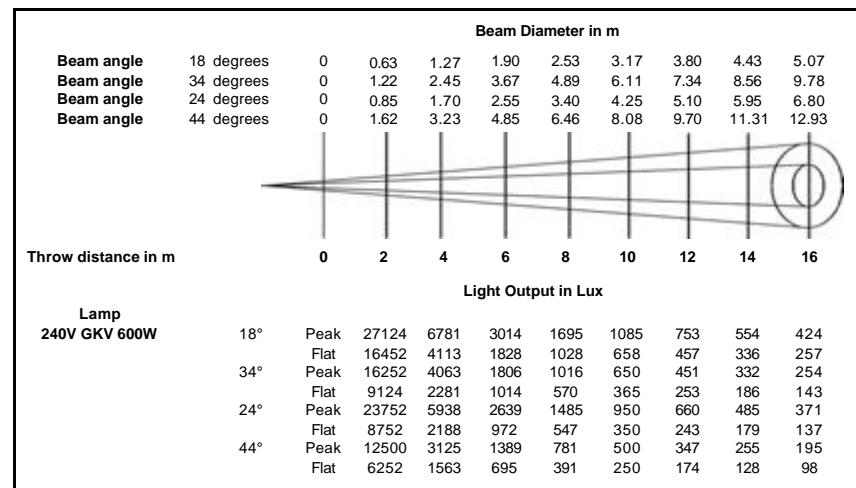


## Physical Data

**Weight:** 5.6kg

**Colour Frame Size:** 125mm x 125mm

**Pattern (Gobo) Size:** M

**Included:** 1x colour frame, 1x M12 nut & bolt set, instruction leaflet.

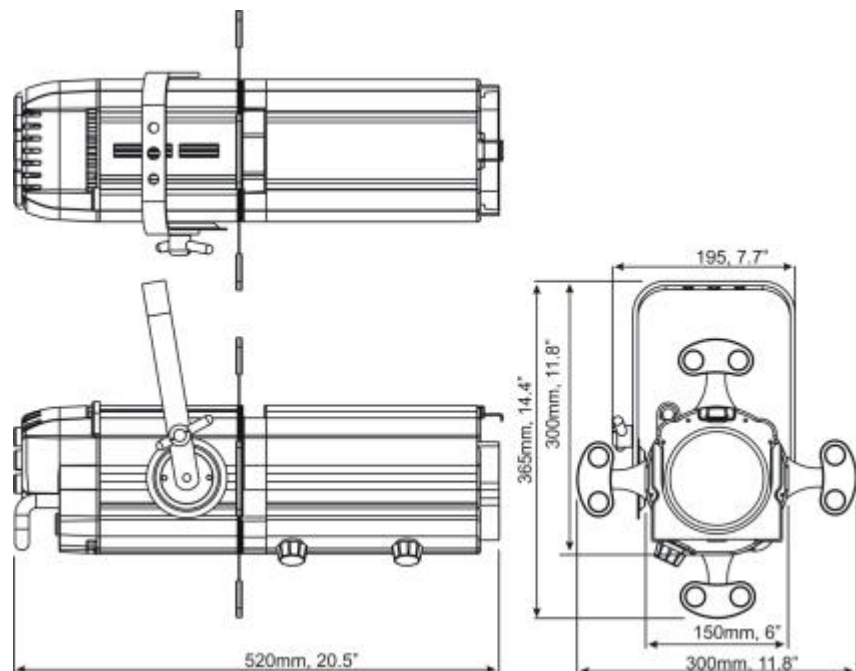

Selecon reserves the right to change the specifications without notice (June 2008).